


188 - 11028

Removal

- 1 Remove cover in trunk (68—480).

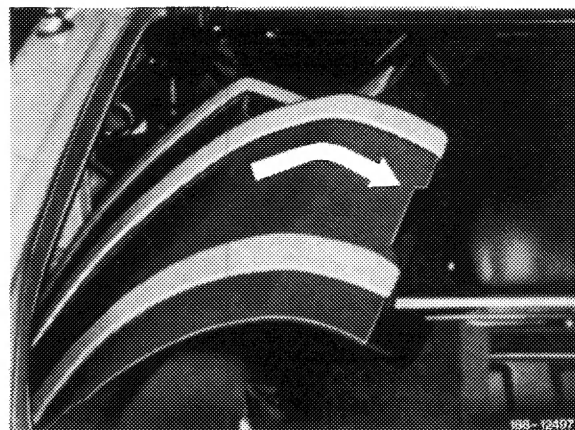


188 - 12497

- 2 Unscrew the two screws from the luggage compartment (as of April 1976 only one screw).
- 3 Pull out rubber cover in forward direction.

Installation

- 4 For installation proceed vice versa.

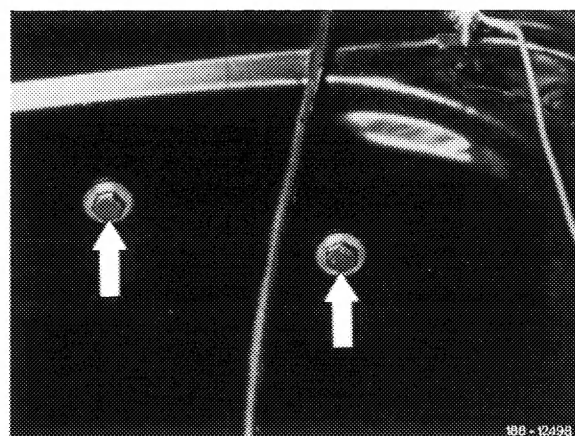

188 - 12498